

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 14 TWN. 17<sub>N</sub> RNG. 2<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 6-26-09  
Party Chief: Greene  
Crew: Taylor  
Type of Marker: Capped Rebar inside 1½" pipe  
Method of Establishment: Crossroad Engineering : Trent Newport  
IN S.P.C. E Zone, NAD 83  
Name: 17021401  
N: 519 339.374 0(m)  
E: 47 673.040 0(m)

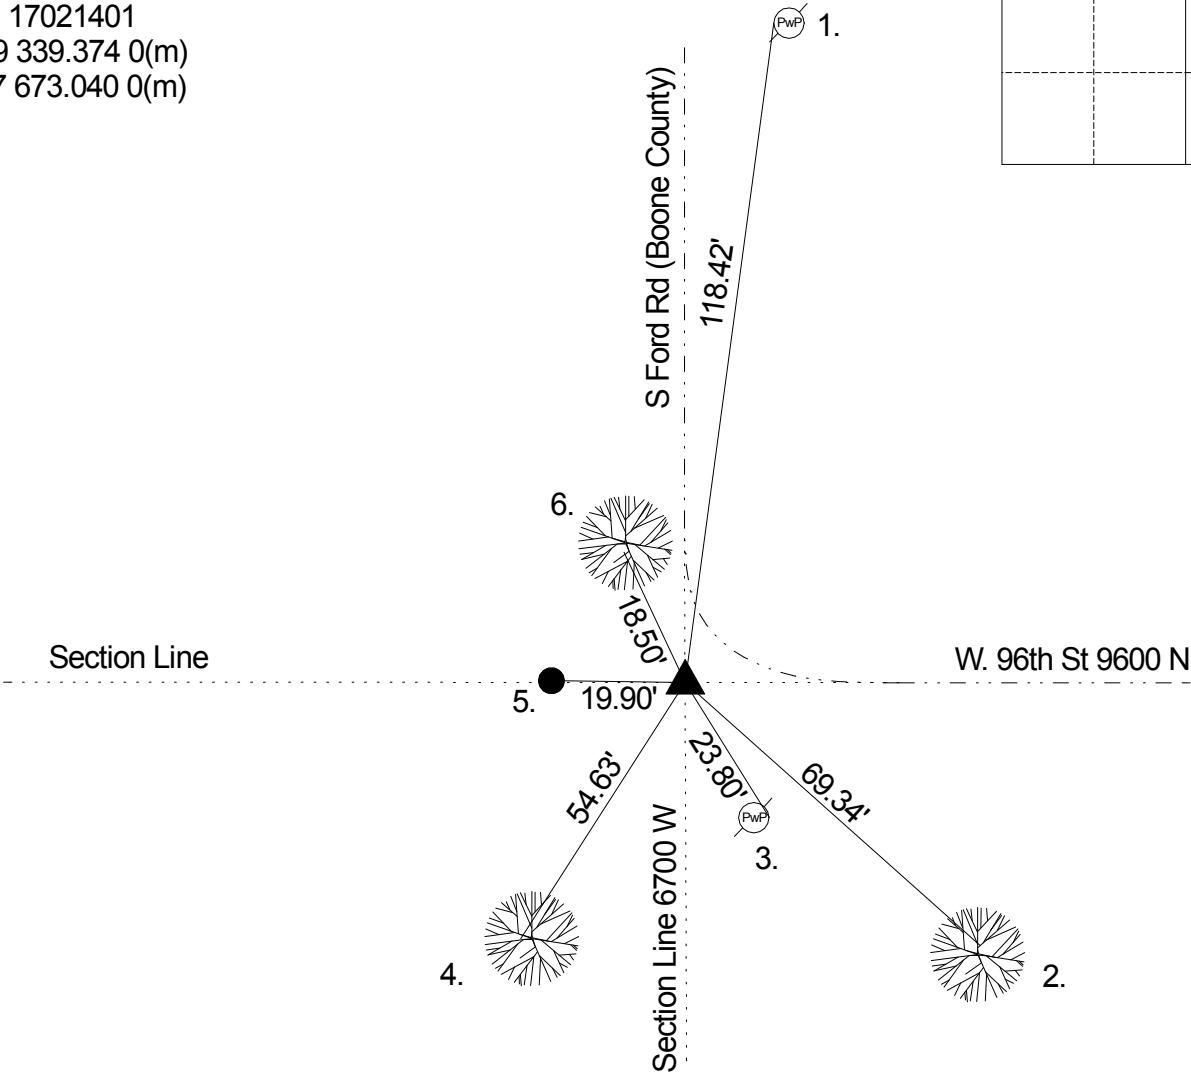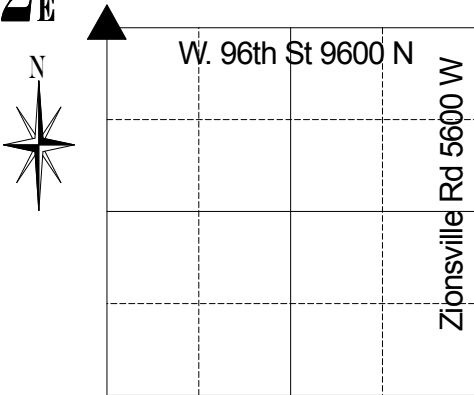

Corner originally set as a post in 1821 by W.B. Laughlin with the following witnesses: 20" black walnut bearing N 69 W 27 links and a 20" sugar bearing S 67 E 11 links (Marion County Atlas p. 4). Corner referenced by Rooker on 12/5/1944 and called a ¾" iron pipe. Corner referenced by MCS on 9/21/52 and called a ¾" iron pipe. Corner referenced by MCS on 1/27/64 and called a ¾" pipe. Corner referenced by McLand on 10/10/69 and called a ¾" pipe. Corner referenced by Miller on 4/10/75 and called a ¾" pipe. Corner referenced by Cleveland on 6/5/85 and called a ¾" iron pin. Corner referenced by Kiste on 9/20/94 and called a 1½" pipe. Corner referenced by Wilcoxon on 9/26/1999 and called a Crossroad Engineers capped rebar inside a 1½" pipe. Corner referenced by Kiste on 2/21/2004 and called a Crossroad Engineers capped rebar inside a 1½" pipe. Corner referenced by Greene on 6/26/09 and called a Crossroad Engineers capped rebar inside a 1½" pipe.

REF.	DISTANCE	DESCRIPTION
1.	118.42'	PK nail w/shiner W PwP #32-153 A 30" up
2.	69.34'	RR spike N 36" sycamore leaning S 36" up
3.	23.80'	PK nail E PwP #30 24" up
4.	54.63'	RR spike W 36" twin sycamore 12" up
5.	19.90'	Due W to capped rebar #S0564 (fd)
6.	18.50'	Landscape spike (bent) set above RR spike S twin sycamore 12" up